

## CEILING LOUDSPEAKERS

# WP Low Impedance Ceiling Loudspeakers


Weatherproof ceiling loudspeakers

# WP 5 & WP 6


WP5 & WP6 ceiling loudspeakers designed without any metal parts in the loudspeakers chassis in order to guaranty waterproofness and reliability in moisture environments. Plastic speaker membrane, moisture isolated magnet and speaker coil. WP5 & WP6 are 5 and 6 inch two way loudspeakers for low impedance speaker systems. For applications, where weather proof sound systems are required.






WP 5 FREQUENCY RESPONSE

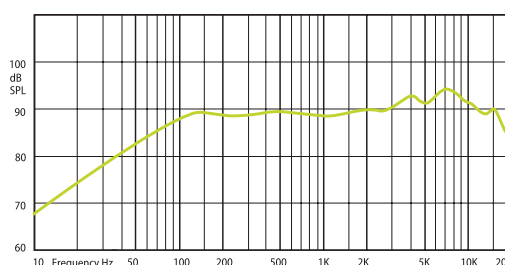

WP 6 FREQUENCY RESPONSE

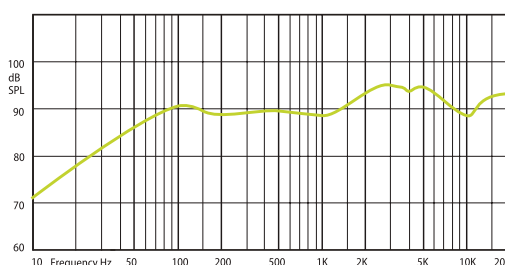

HORIZONTAL / VERTICAL POLAR DIAGRAMS



— Horizontal / Vertical

	WP 5	WP 6
Rated power	40 W	50 W
Impedance	4 Ω	4 Ω
Sensitivity	89 dB (1 W/1 m)	90 dB (1 W/1 m)
Maximum SPL	105 dB (Pmax/1 m)	106 dB (Pmax/1 m)
Frequency response	80 Hz – 20 kHz	70 Hz – 20 kHz
Dispersion at 1000 Hz	120° conical	120° conical
Driver dimensions	5" (130 mm) woofer, 0,5" (13 mm) tweeter, coaxial	6" (152 mm) woofer, 0,5" (13 mm) tweeter, coaxi
Dimensions	ø 165 mm × 69 mm	ø 191 mm × 75 mm
Weight	0,8 kg	1 kg
Material	Plastic	Plastic
Colour	White (RAL 9016)	White (RAL 9016)