

CABINET LOUDSPEAKERS

iSpeak Surface Mount Plastic Loudspeakers

Plastic enclosure surface mount loudspeaker with built-in 100V line transformer.




iSpeak 5

iSpeak 5 ABS plastic cabinet loudspeakers for constant voltage speaker installation systems. Effortless mounting on any surface: walls or ceilings. Modern, simple and compact form design cabinet loudspeaker with integrated 5" full range driver. This loudspeaker produces clear intelligible sound and is good for speech and back ground music applications.


Especially suitable for places where loudspeakers should not make any influence to interior.





HORIZONTAL / VERTICAL POLAR DIAGRAMS



FREQUENCY RESPONSE

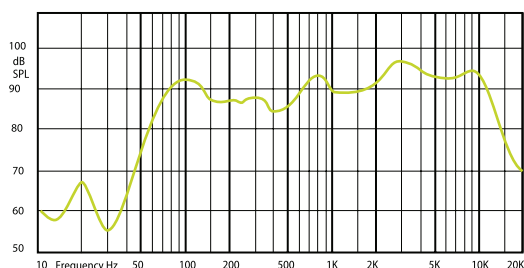

IMPEDANCE

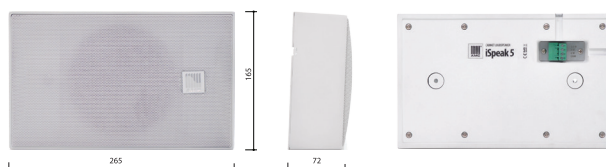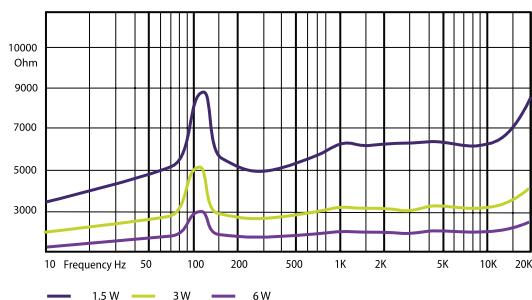

| Technical Specifications | iSpeak 5 |
|--------------------------|--|
| Rated power | 6 W |
| Transformer power taps | 6 W - 3 W - 1,5 W |
| Sensitivity | 90 dB (1W/1m) |
| Maximum SPL | 102 dB (Pmax/1m at 2834 kHz) |
| Frequency response | 70 Hz - 18 kHz |
| Dispersion at 1000 Hz | 180° (H), 140° (V) |
| Driver dimensions | 5" (127 mm) |
| Dimensions | 265 mm x 165 mm x 72 mm |
| Weight | 1,2 kg |
| Material | High impact polystyrene plastic, steel grill |
| Colour | White (RAL 9016) |

CABINET LOUDSPEAKERS

iSpeak Surface Mount Plastic Loudspeakers




Plastic enclosure surface mount loudspeaker with built-in 100V line transformer.

iSpeak 5


iSpeak 5 ABS plastic cabinet loudspeakers for constant voltage speaker installation systems. Effortless mounting on any surface: walls or ceilings. Modern, simple and compact form design cabinet loudspeaker with integrated 5" full range driver. This loudspeaker produces clear intelligible sound and is good for speech and back ground music applications. Especially suitable for places where loudspeakers should not make any influence to interior.





HORIZONTAL / VERTICAL POLAR DIAGRAMS



FREQUENCY RESPONSE

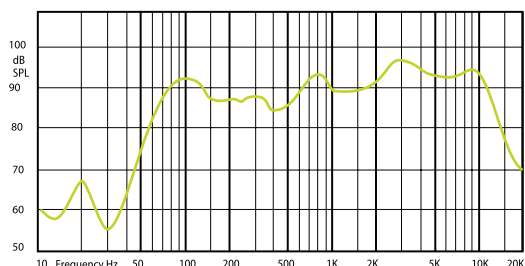

IMPEDANCE

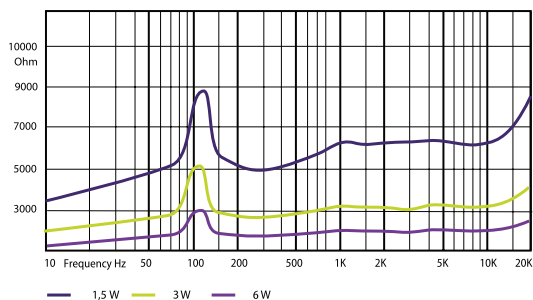

| Technical Specifications | iSpeak 5 |
|--------------------------|--|
| Rated power | 6 W |
| Transformer power taps | 6 W - 3 W - 1,5 W |
| Sensitivity | 90 dB (1W/1m) |
| Maximum SPL | 102 dB (Pmax/1m at 2834 kHz) |
| Frequency response | 70 Hz - 18 kHz |
| Dispersion at 1000 Hz | 180° (H), 140° (V) |
| Driver dimensions | 5" (127 mm) |
| Dimensions | 265 mm x 165 mm x 72 mm |
| Weight | 1,2 kg |
| Material | High impact polystyrene plastic, steel grill |
| Colour | White (RAL 9016) |